


PAIRED PERPENDICULAR CURB RAMPS AT LARGE RADIUS

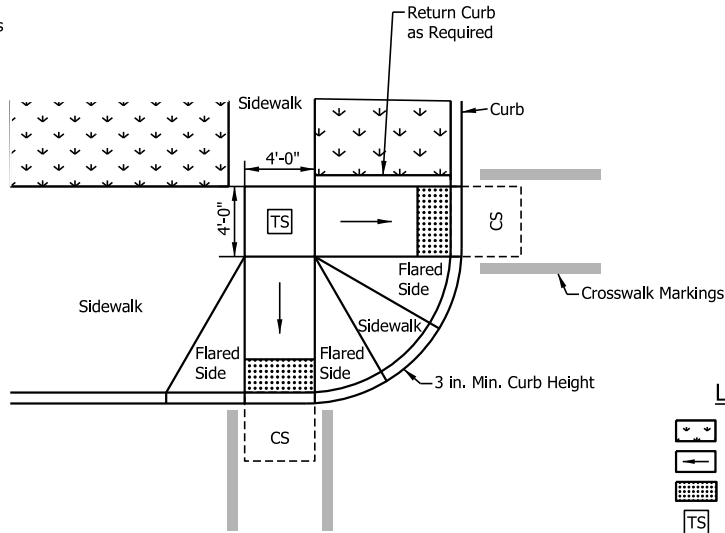

PAIRED PERPENDICULAR CURB RAMPS AT SMALL RADIUS

**NOTES:**

1. The turning space shall have a minimum clear dimension of 4 ft x 4 ft and a running slope of 2.00% maximum. Where the turning space is constrained at the back of the sidewalk, the minimum clear dimension shall be 4 ft x 5 ft, with the 5-ft dimension in the direction of the ramp running slope.

**LEGEND:**


- Buffer or Other Non-Walkable Surface
- Ramp
- Detectable Warning Surface
- Turning Space
- Clear Space

INDIANA DEPARTMENT OF TRANSPORTATION

PAIRED PERPENDICULAR CURB RAMPS  
TYPICAL PLACEMENT

SEPTEMBER 2016

STANDARD DRAWING NO. E 604-SWCR-03



*/s/ Elizabeth W. Phillips* 03/15/16  
DESIGN STANDARDS ENGINEER DATE

*/s/ Mark A. Miller* 03/18/16  
CHIEF ENGINEER DATE